SAMYANG ELECTRONICS *GBU35005--- GBU3510*


GLASS PASSIVATED BRIDGE RECTIFIERS

VOLTAGE RANGE: 50 --- 1000 V
CURRENT: 35.0 A

FEATURES

- ◇ Rating to 1000V PRV
- ◇ 400 Amperes surge capability
- ◇ High efficincy
- ◇ Electrically isolated metal case for maximum heat dissipation
- ◇ Mounting: thru hole for # 8 screw Mounting
- ◇ Glass passivated chip junctions

GBU35

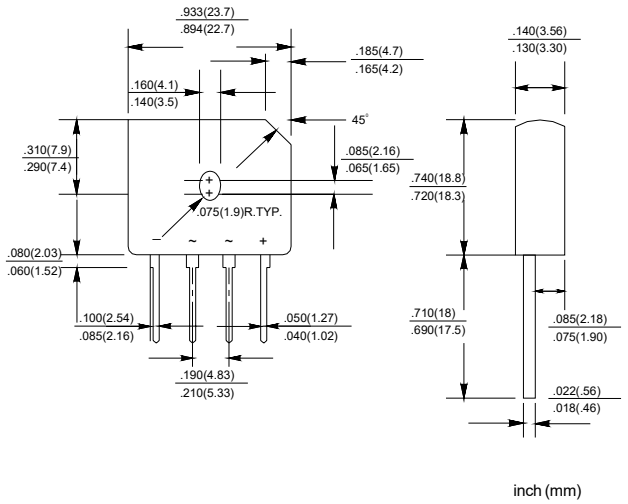

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25℃ ambient temperature unless otherwise specified.

Single phase,half wave,60 Hz,resistive or inductive load. For capacitive load,derate by 20%.

		GBU 35005	GBU 3501	GBU 3502	GBU 3504	GBU 3506	GBU 3508	GBU 3510	UNITS
Maximum recurrent peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum average forw ard Output current @T_A=25℃	$I_{F(AV)}$	35.0							A
Peak forw ard surge current 8.3ms single half-sine-w ave superimposed on rated load	I_{FSM}	400.0							A
Maximum instantaneous forw ard voltage @ 17.5 A	V_F	1.1							V
Maximum reverse current @T_A=25℃ at rated DC blocking voltage @T_A=100℃	I_R	10.0 1.0							μA
Operating junction temperature range	T_J	- 55 ---- + 155							℃
Storage temperature range	T_{STG}	- 55 ---- + 150							℃

www.diode.co.kr

FIG.1 – PEAK FORWARD SURGE CURRENT

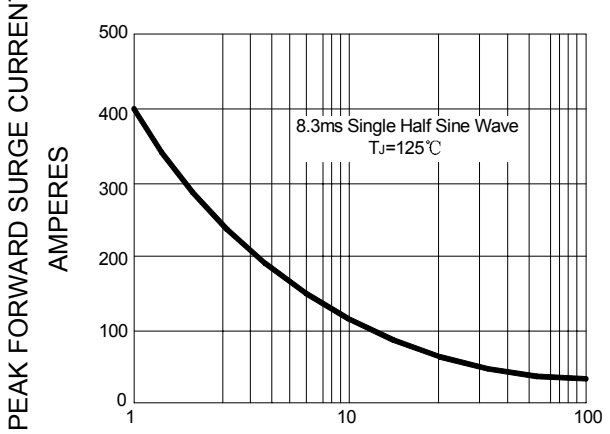


FIG.2 – FORWARD DERATING CURVE

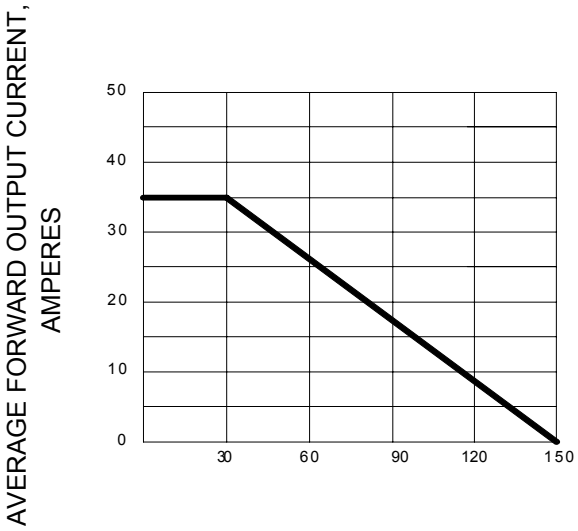


FIG.3 – TYPICAL FORWARD CHARACTERISTIC

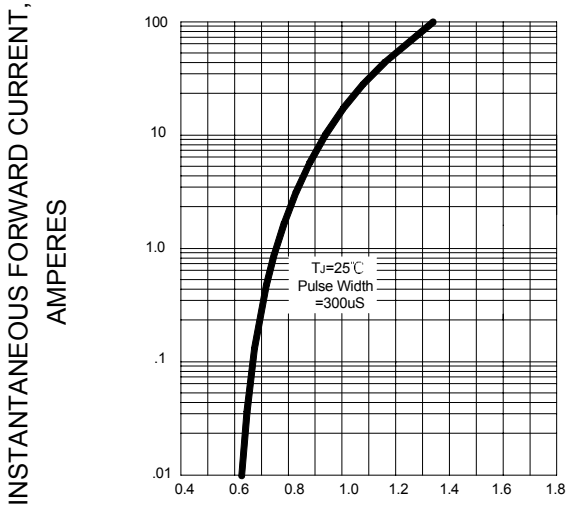


FIG.4 – TYPICAL REVERSE CHARACTERISTIC

